


RGB 2503R
Squama

Squama high performance reverse blade quiet fan

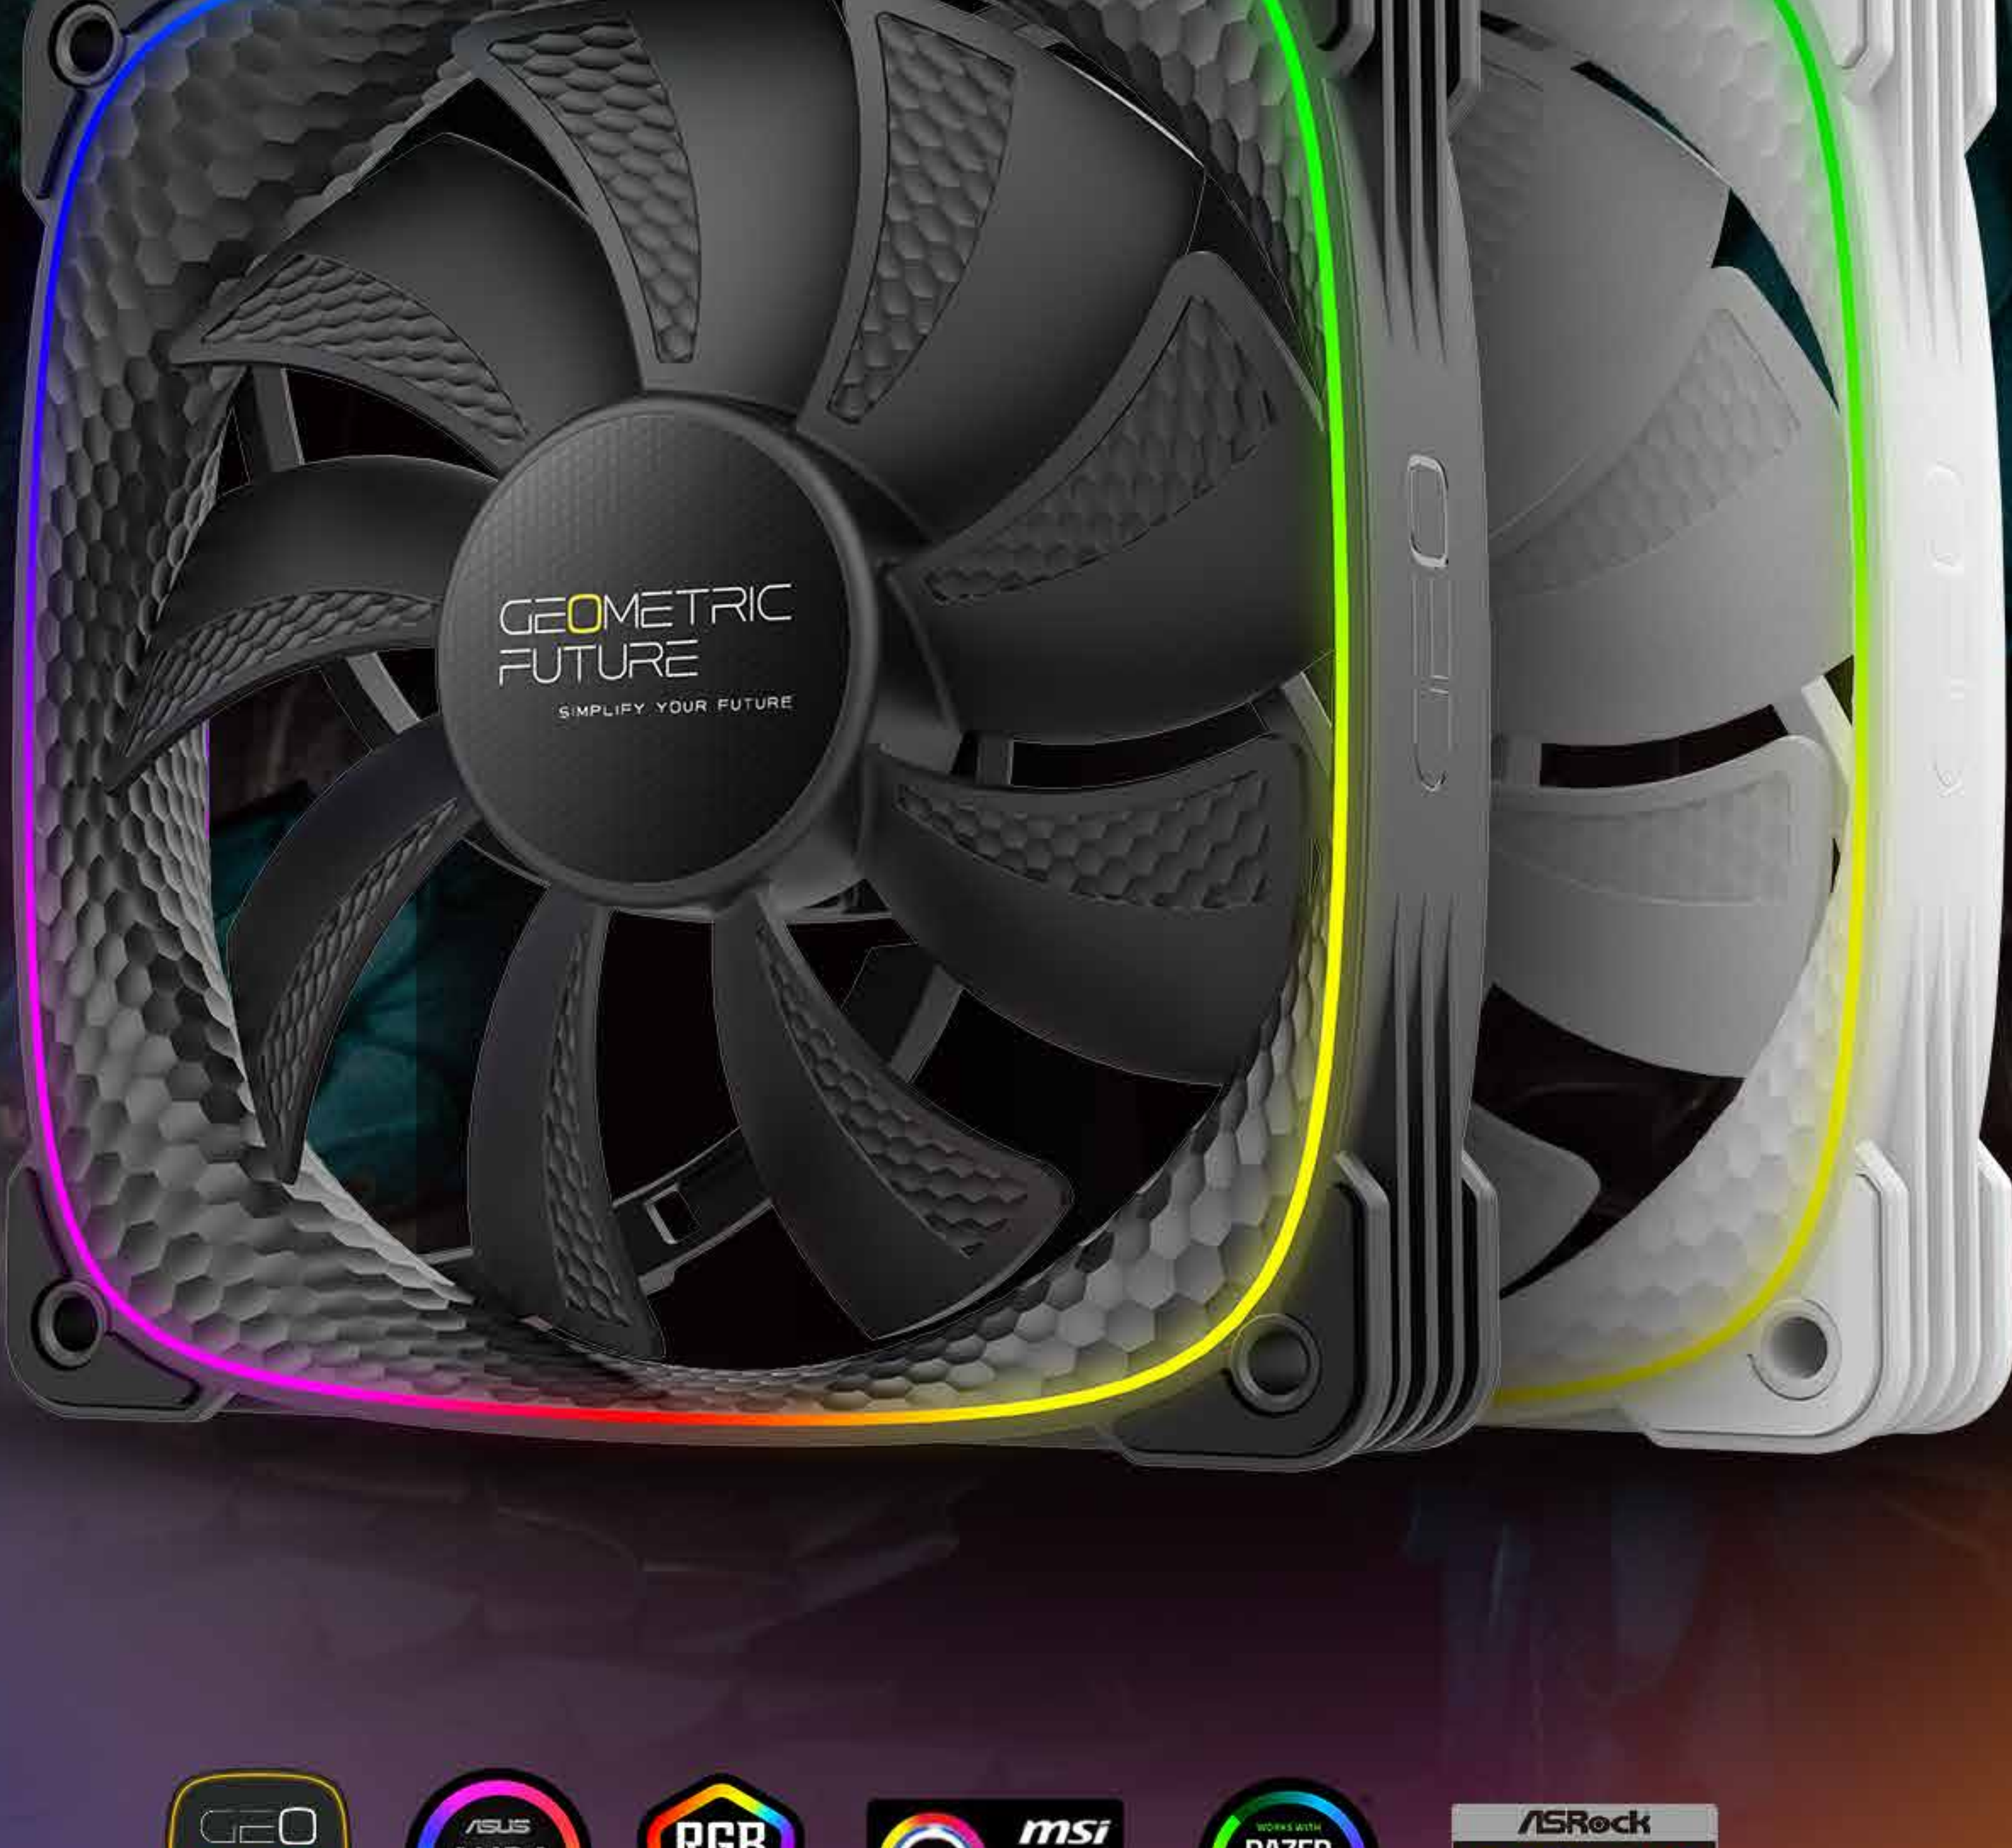

SPECIFICATIONS

Package	Single Pack	Triple Package
Type	Squama 2503R	Squama 2503R
Fan Dimensions (L*w*h)mm	120 x 120 x 25mm	120 x 120 x 25mm
Color	BLACK\WHITE	BLACK\WHITE
Materials	PBT\PC\TPE	PBT\PC\TPE
Speed Mode	1500RPM(max)	1500RPM(max)
Airflow (Cfm)	57.67 CFM	57.67 CFM
Air Pressure (Mmh2o)	1.73 mmH ₂ O	1.73 mmH ₂ O
Noise Level (Dba)	29.87 dBA (max)	29.87 dBA (max)
Motor Rated Voltage (V)	12V	12V
Motor Rated Current(A)	0.15 A	0.15 A
Motor Rated Power(W)	1.8 A	1.8 A
Argb Rated Voltage (V)	5V	5V
Argb Rated Current(A)	0.53A	0.53A
Argb Rated Power(W)	2.65W	2.65W
Led Interface	3-PIN	3-PIN
Power Interface	4-PIN	4-PIN
Packing Includes	Squama 2503R Fan x 1 Screws x 4 PWM extension cord x 1 ARGB extension cord x 1	Squama 2503R Fan x 3 Screws x 12 PWM extension cord x 3 ARGB extension cord x 3
Warranty	Two-year Limited Warranty	Two-year Limited Warranty



PARTS KIT INCLUDES

GEOMETRIC FUTURE
SQUAMA 2503R


Single Pack

- Squama 2503R Fan x 1
- Screws x 4
- PWM extension cable x1
- ARGB extension cable x1




Triple Pack

- Squama 2503R Fan x 3
- Screws x 12
- PWM extension cable x3
- ARGB extension cable x3

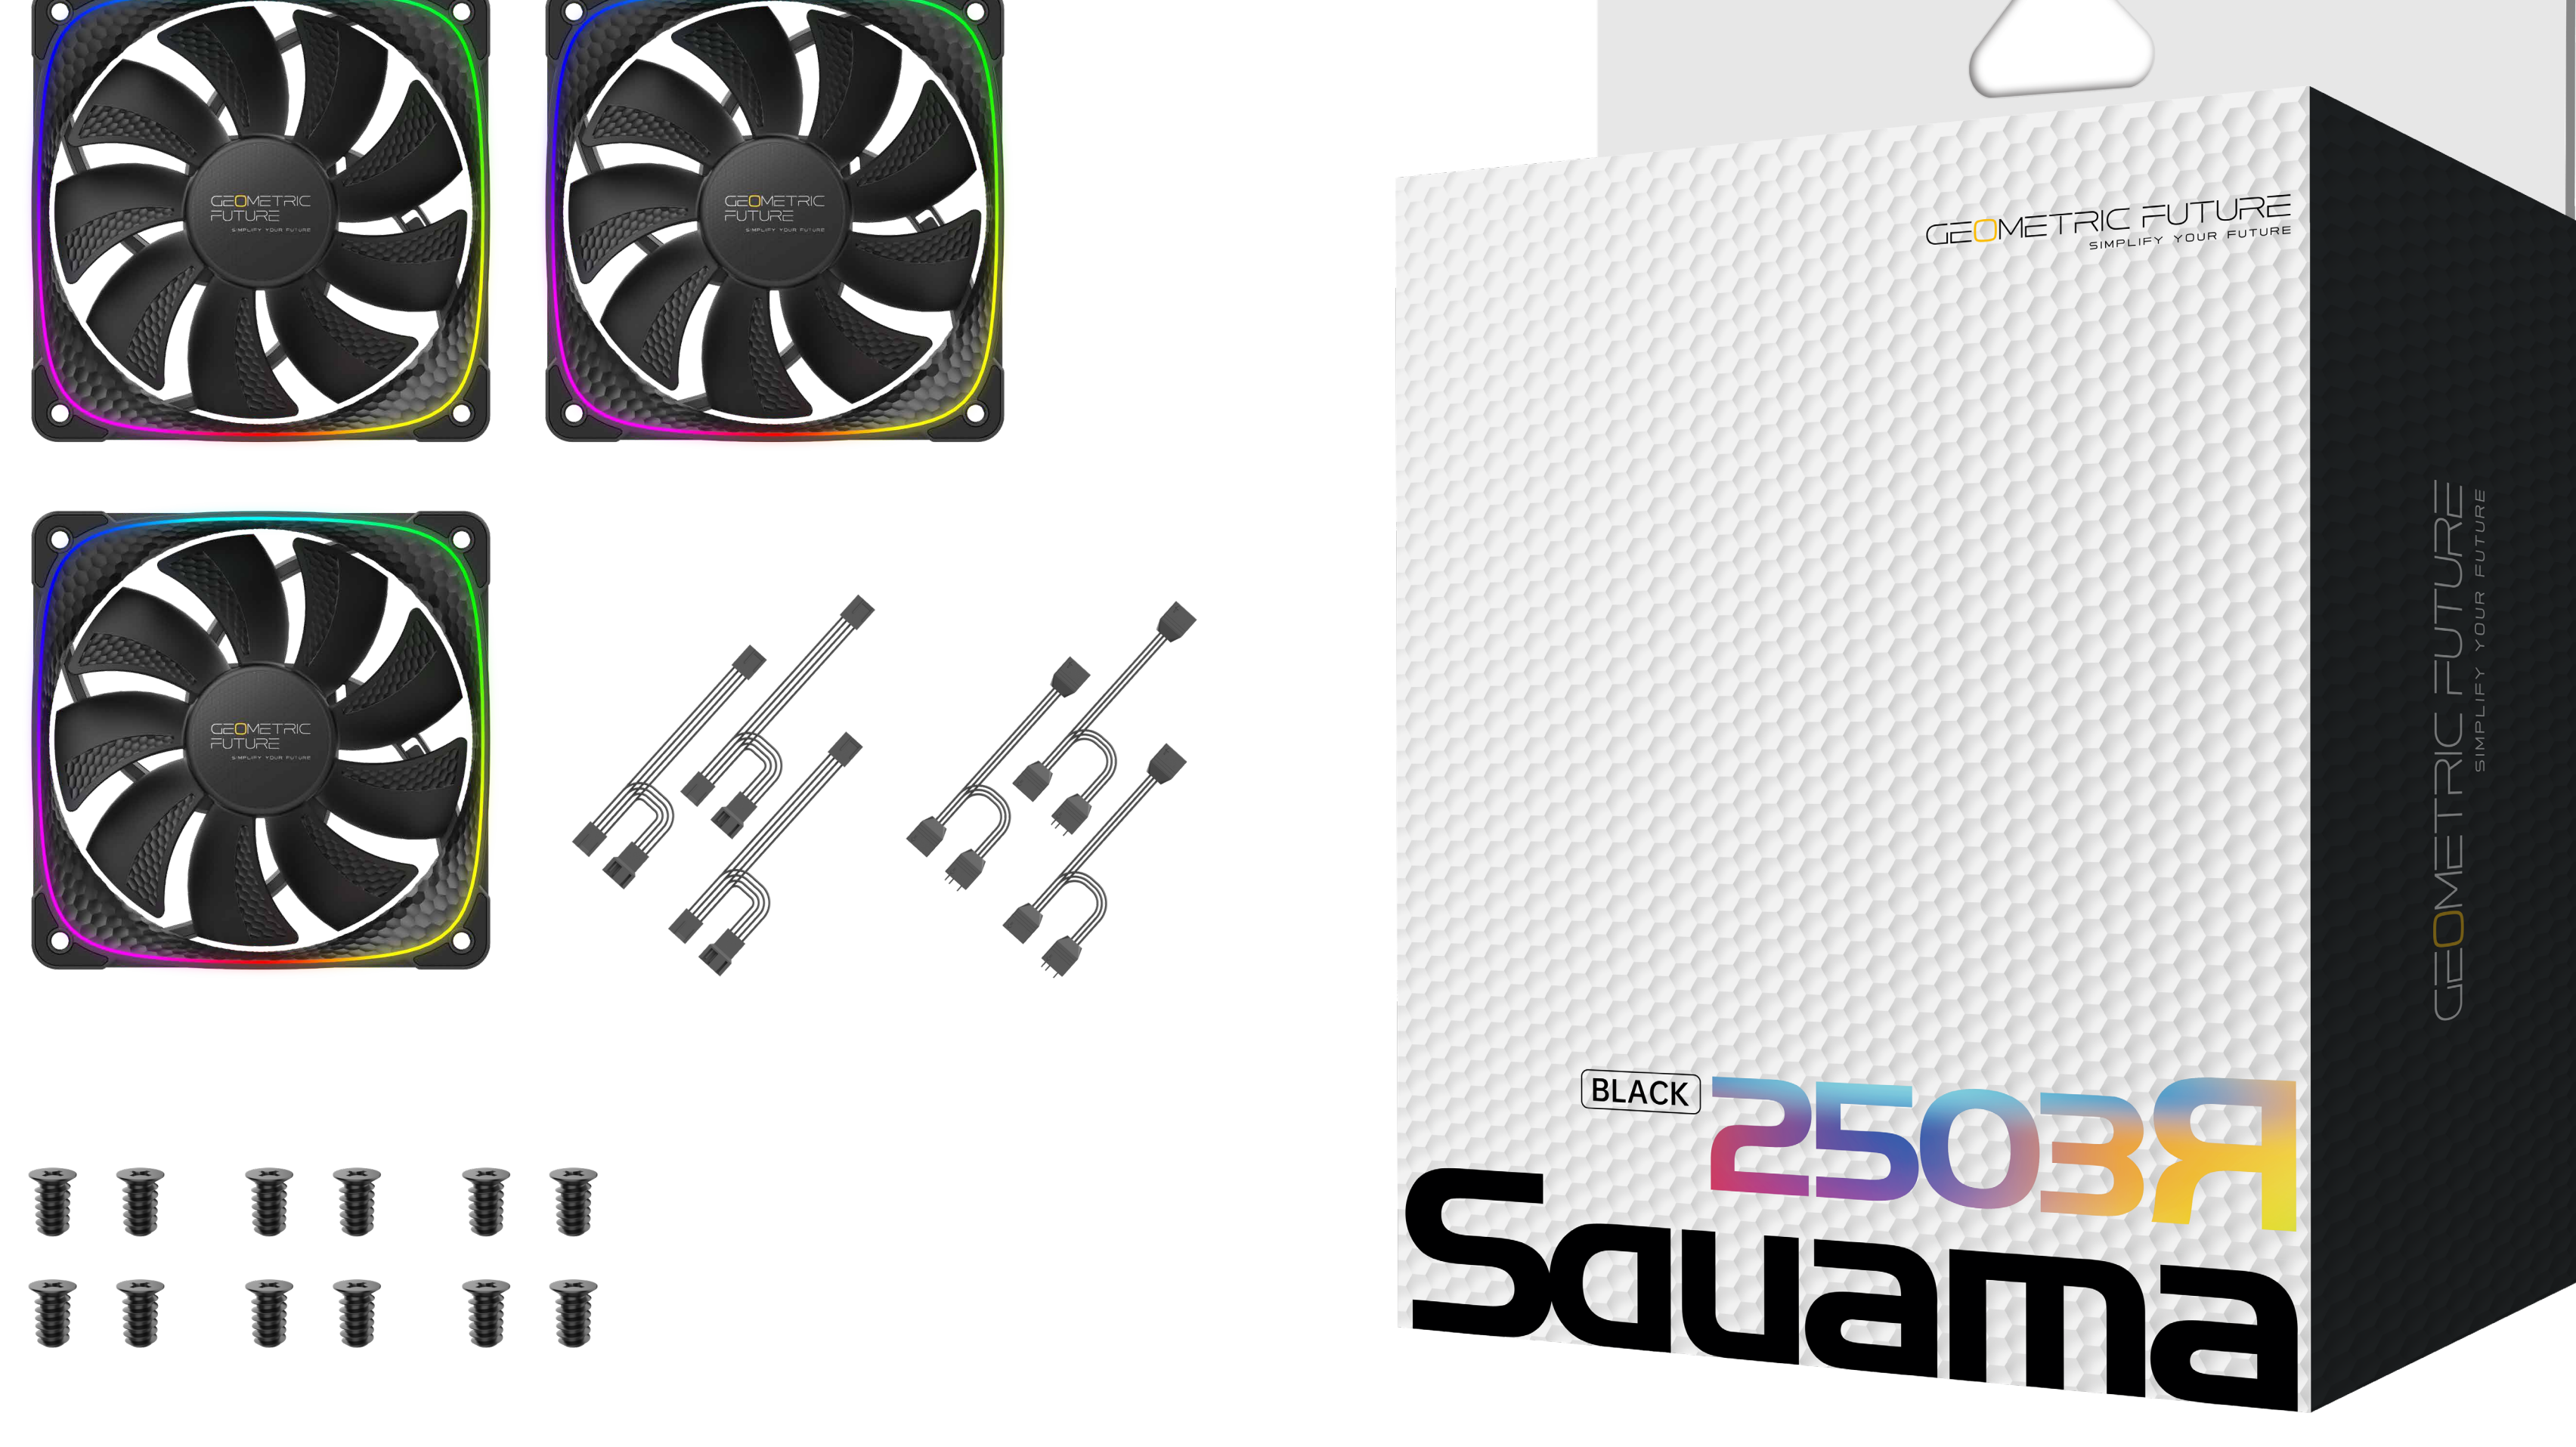

Fans/ARGB Cable Connecting to the motherboard

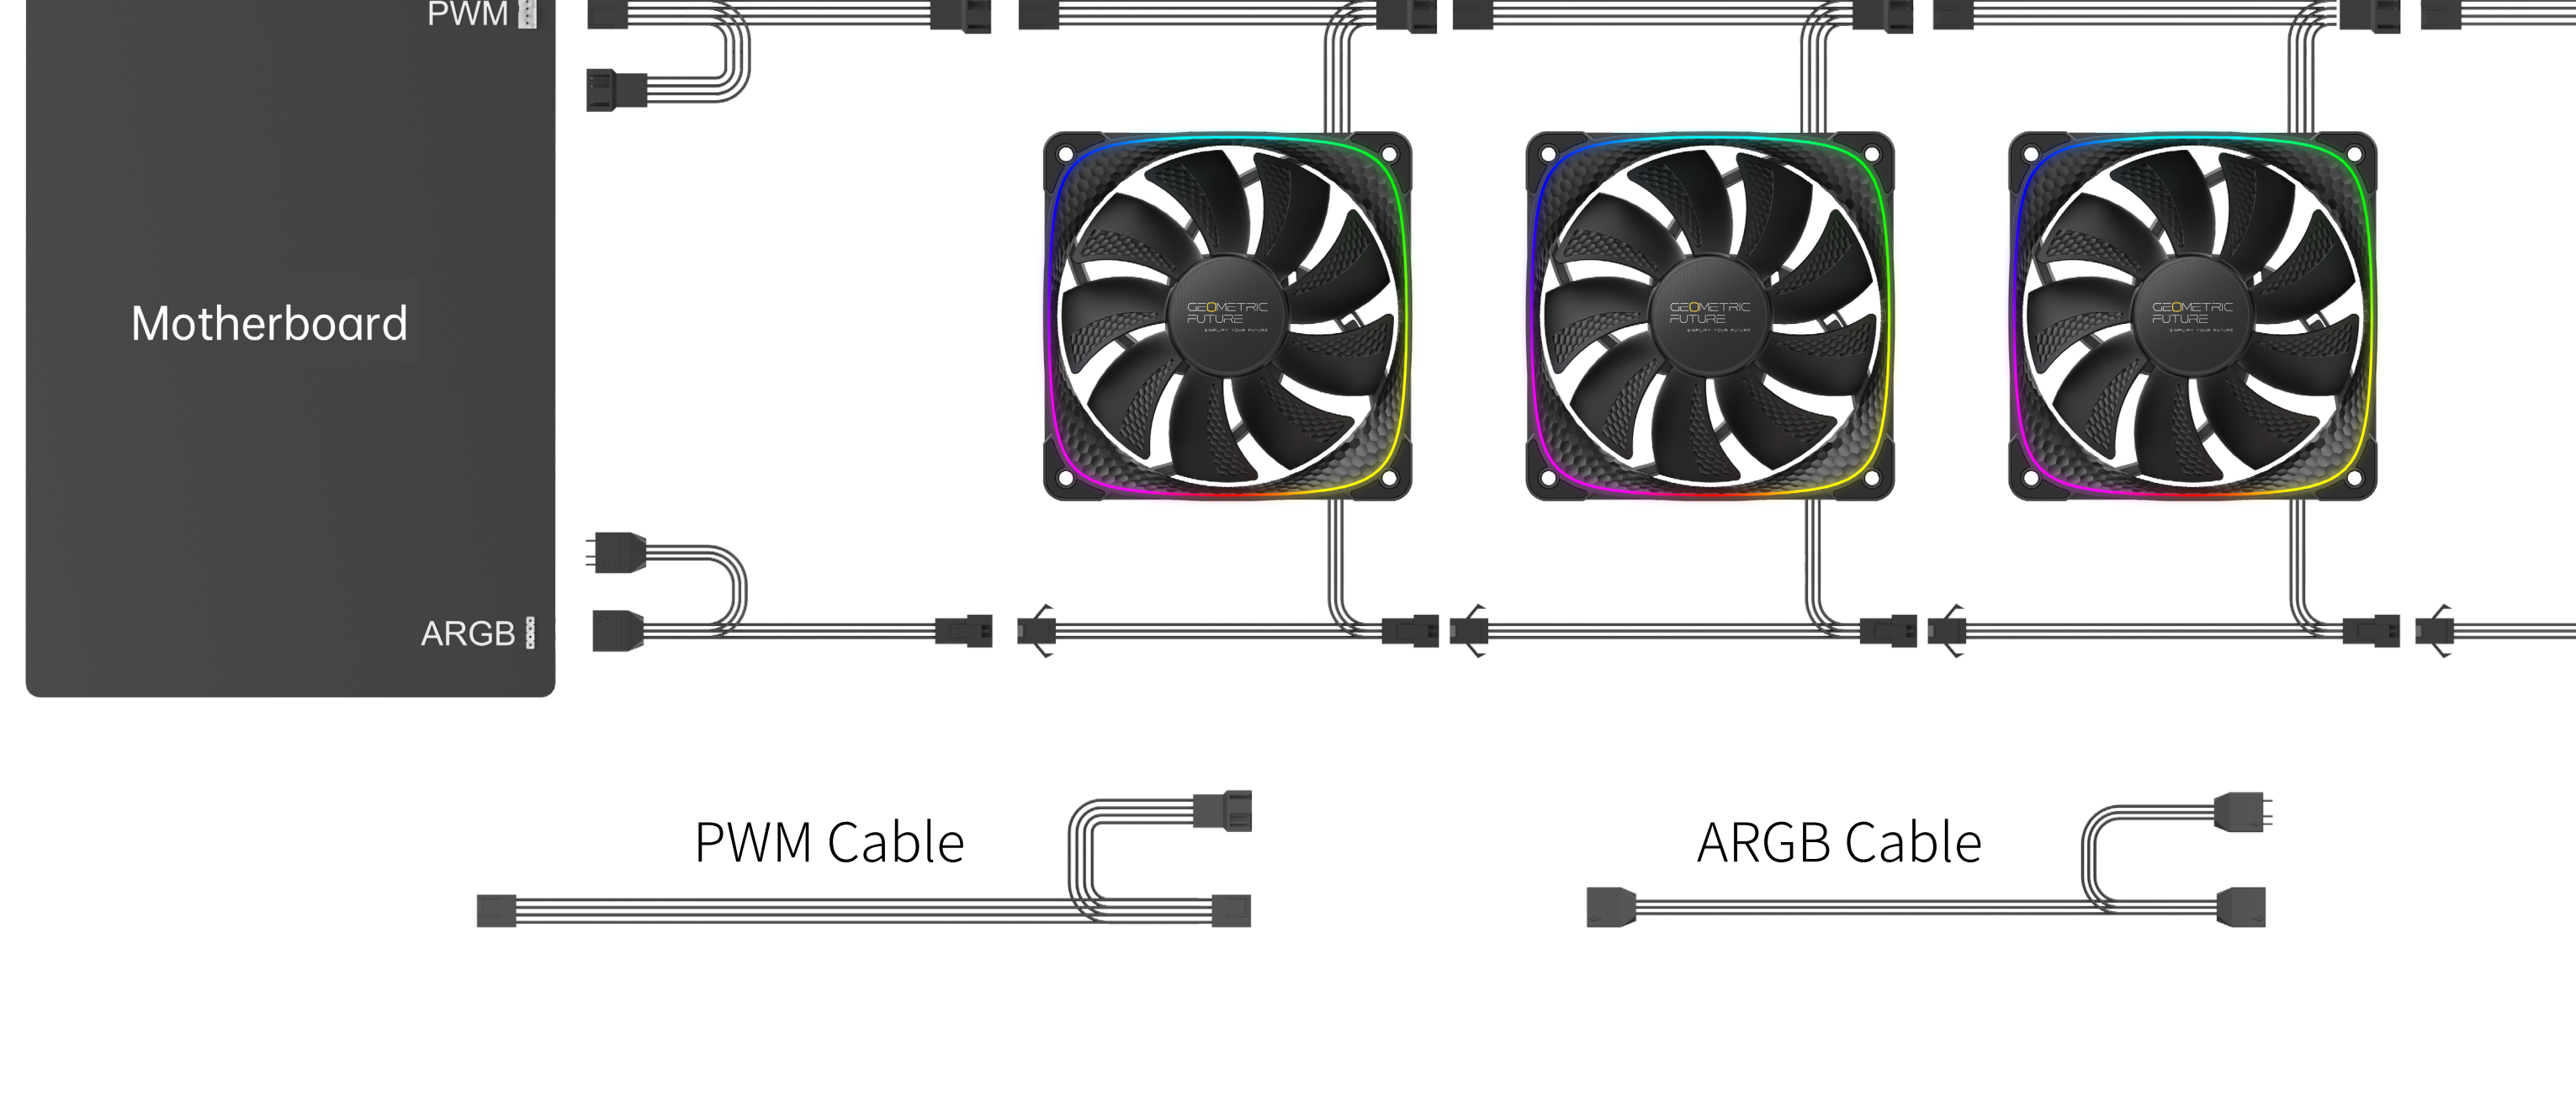

Tap the button to change the lighting modes which is as shown in the below.(Hold the button to turn on or off the lights.)

1	GEOMETRIC FUTURE yellow and orange is recommended
2	Single color gradient
3	Colorful gradient
4	Colorful flow
5	Lighting Form:Red, green, blue, yellow, purple, white
6	Breathing:Red, green, blue, yellow, purple, white
7	Flow: Red, green, blue, yellow, purple, white

PRECAUTIONS

GEOMETRIC FUTURE
SQUAMA 2503R

1. Install in accordance with the user manual’ s instructions.
2. Please wear electrostatic discharge (ESD) rings and protective gloves when installing the PC.The products or components to be operated by power supply must be connected in the correct way and line sequence. Otherwise, hardware such as the computer motherboard may be burned down and personal injury may occur.
3. Do not use this product for any purpose other than the specified ones, and do not modify this product to avoid failure and damage to the product and related components.
4. To move the product and its contents, please remove all components of the product before operation to avoid damage to the product and related components,even more personal injury.
5. If you encounter any questions about product assembly or use, please consult the official customer service in time to obtain correct guidance before operation.
6. If the product and components are damaged due to unauthorized assembly,you will pay for the repair and the replacement for the components.
7. Do not insert foreign materials into the fan blade, so as not to damage the normal operation of the product.
8. Do not modify the original fan/pump cable and port in order to avoid short circuit which may burn down the products.
9. Do not touch the impeller while the fan is running to avoid injury or damage to the product.
10. Please only use this product in a computer case and keep this product away from any liquids.