GEOMETRIC FUTURE

Geometric Future
Squama

2505
Squama

Geometric future's Squama series fan with high-performance and low noise.Innovative design, we are different!

GEO RGB ASUS AURA SYNC RGB FUSION 2.0 RGB msi MYSTIC LIGHT SYNC WORKS WITH RAZER CHROMA RGB ASRock POLYCHROME SYNC

SPECIFICATIONS

Package	Single Pack	Triple package
Type	Squama 2505	Squama 2505
Fan Dimensions (L*w*h)mm	120 x 120 x 25mm	120 x 120 x 25mm
Color	BLACK/WHITE/ORANGE	BLACK/WHITE/ORANGE
Materials	PBT\PC\TPE	PBT\PC\TPE
Speed Mode	2000RPM(max)	2000RPM(max)
Airflow（Cfm)	91.3 CFM	91.3 CFM
Air Pressure（Mmh2o)	4.28 mmH_2O	4.28 mmH_2O
Noise Level（Dba)	35.06 dBA（max)	35.06 dBA（max)
Motor Rated Voltage（V)	12V	12V
Motor Rated Current(A)	0.32 A	0.32 A
Argb Rated Voltage（V)	5V	5V
Argb Rated Current(A)	0.29A	0.29A
Argb Rated Power(A)	1.45 W	1.45 W
Led Interface	3-PIN	3-PIN
Power Interface	4-PIN	4-PIN

Packing Content	Squama 2505 Fan x 1 Screws x 4 PWM extension cord x 1 ARGB extension cord x 1	Squama 2505 Fan x 3 Addressable RGB controller x 1 Screws x 12 PWM extension cord x 3 ARGB extension cord x 3
Warranty	Two-year Limited Warranty	Two-year Limited Warranty

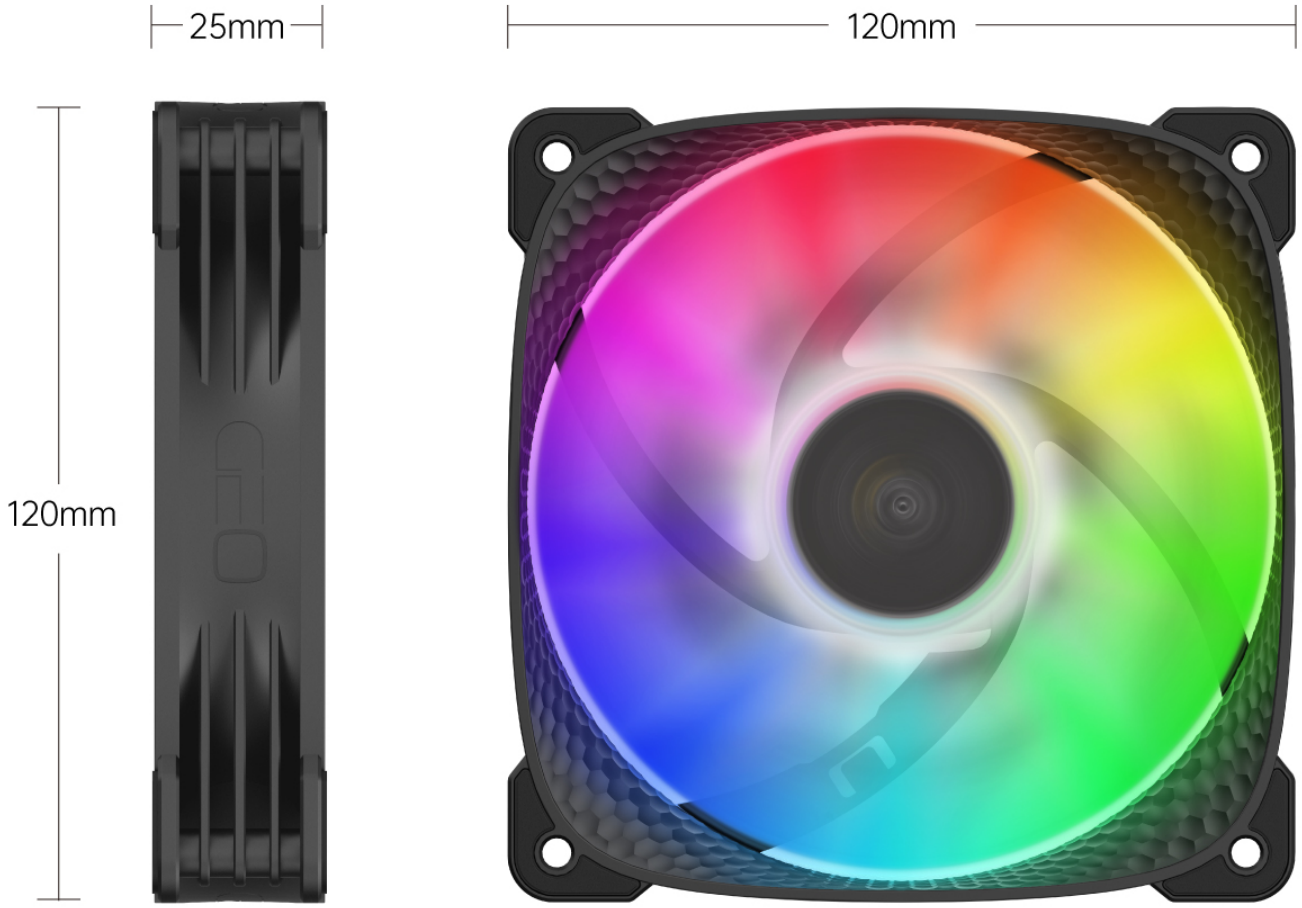

PARTS KIT INCLUDES

GEOMETRIC
FUTURE
SQUAMA 2505

Single Pack

- Squama 2505B Fan x 1
- Screws x 4
- PWM extension cable x1
- ARGB extension cable x1



GEOMETRIC FUTURE
SIMPLIFY YOUR FUTURE
RGB
2505B
Squama
Squama 2505B

Triple Pack

- Squama 2505B Fan x 3
- Addressable RGB controller x 1
- Screws x 12
- PWM extension cable x3
- ARGB extension cable x3

GEOMETRIC FUTURE
SIMPLIFY YOUR FUTURE



3 IN 1
2505B
Squama

Fans/ARGB Cable Connecting to the motherboard

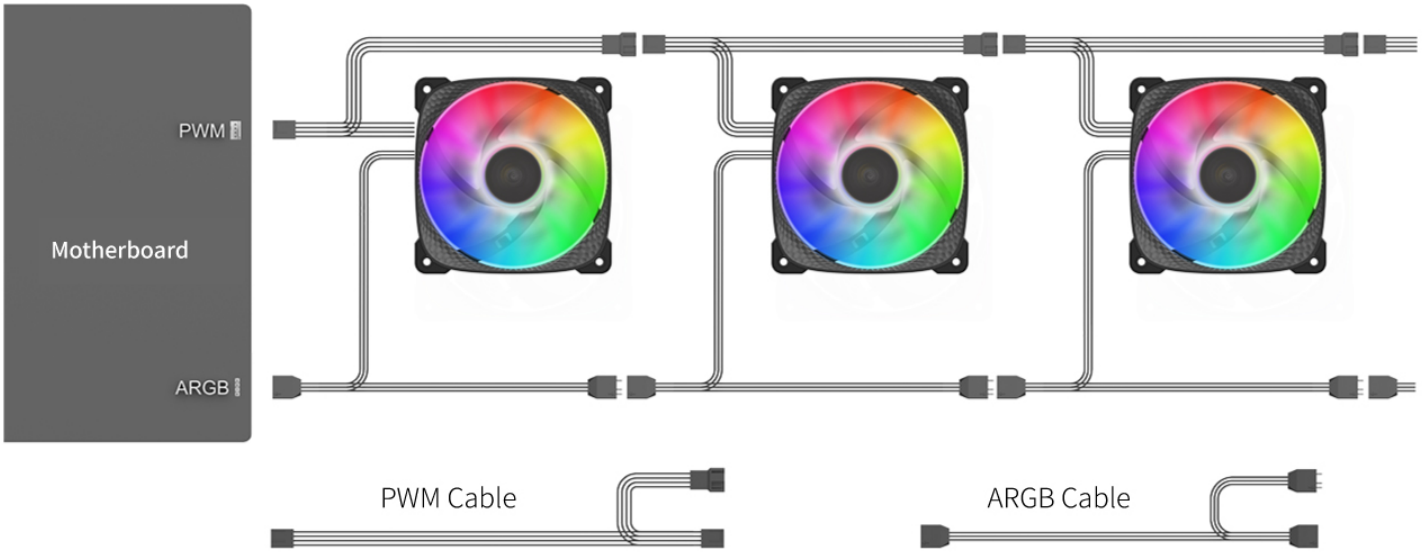

ARGB One-Click Controller Installation

If your motherboard does not support ARGB effect,you could use the included ARGB One-Click Controller to connect to your PSU’ s SATA cable and the Addressable Cable in order to use the different of lighting effects.

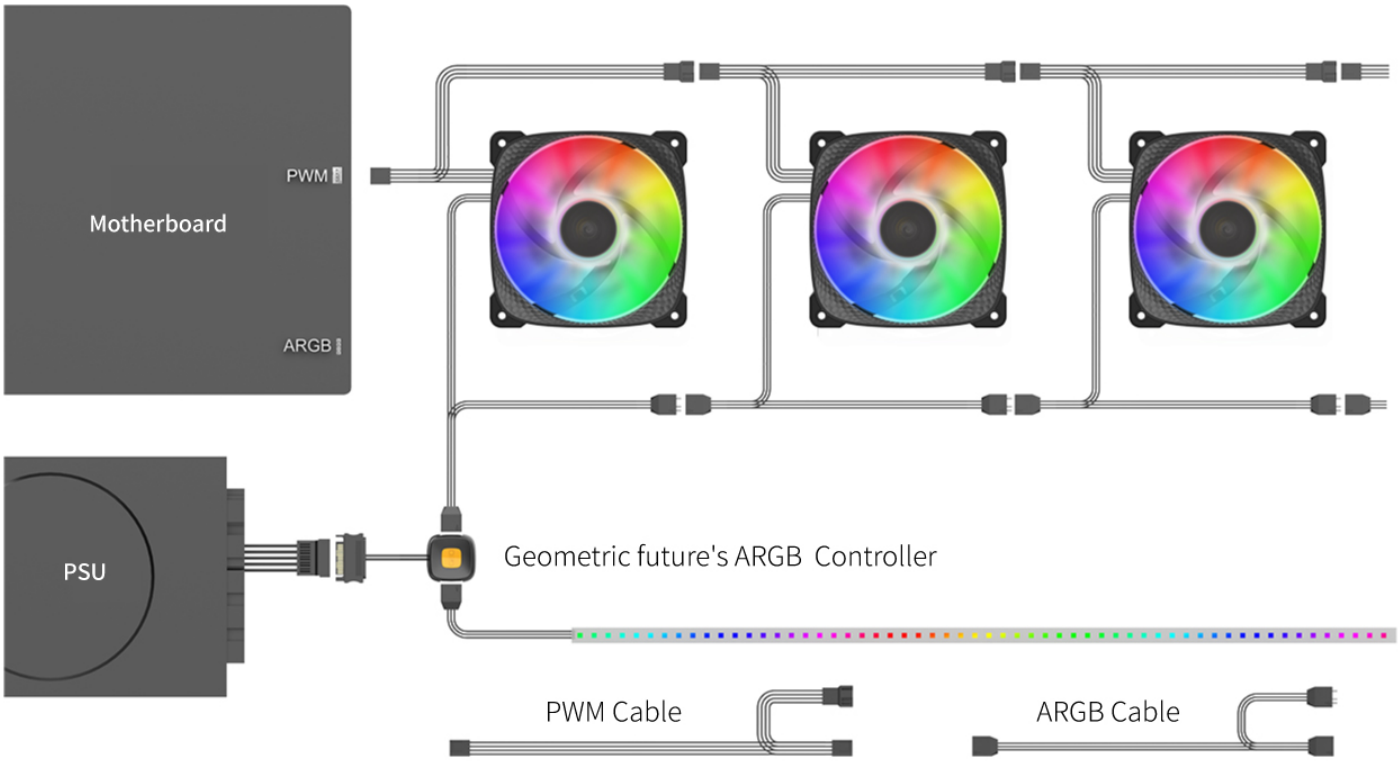

Tap the button to change the lighting modes which is as shown in the below.(Hold the button to turn on or off the lights.)

1	**GEOMETRIC FUTURE yellow and orange is recommended**		
2	Single color gradient	5	Lighting Form:Red, green, blue, yellow, purple, white
3	Colorful gradient	6	Breathing:Red, green, blue, yellow, purple, white
4	Colorful flow	7	Flow: Red, green, blue, yellow, purple, white

---

PRECAUTIONS

GEOMETRIC
FUTURE
SQUAMA 2505

---

1. Install in accordance with the user manual' s instructions.

2. Please wear electrostatic discharge (ESD) rings and protective gloves when installing the PC.The products or components to be operated by power supply must be connected in the correct way and line sequence. Otherwise, hardware such as the computer motherboard may be burned down and personal injury may occur.

3. Do not use this product for any purpose other than the specified ones, and do not modify this product to avoid failure and damage to the product and related components.

4. To move the product and its contents, please remove all components of the product before operation to avoid damage to the product and related components,even more personal injury.

5. If you encounter any questions about product assembly or use, please consult the official customer service in time to obtain correct guidance before operation.

6. If the product and components are damaged due to unauthorized assembly,you will pay for the repair and the replacement for the components.

7. Do not insert foreign materials into the fan blade, so as not to damage the normal operation of the product.

8. Do not modify the original fan/pump cable and port in order to avoid short circuit which may burn down the products.

9. Do not touch the impeller while the fan is running to avoid injury or damage to the product.

10. Please only use this product in a computer case and keep this product away from any liquids.